



RACS

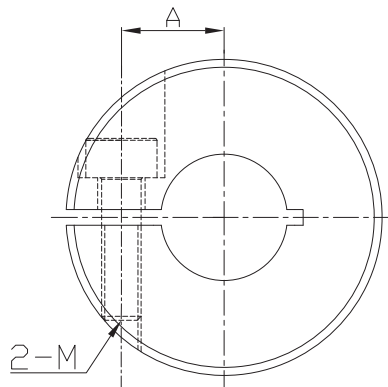

- Light, very low inertial and high sensibility.
- Maintenance free, super anti-oil and corrosion-resistance.
- Beam type with no allowable offset almost, please show the axis entirely in operating.

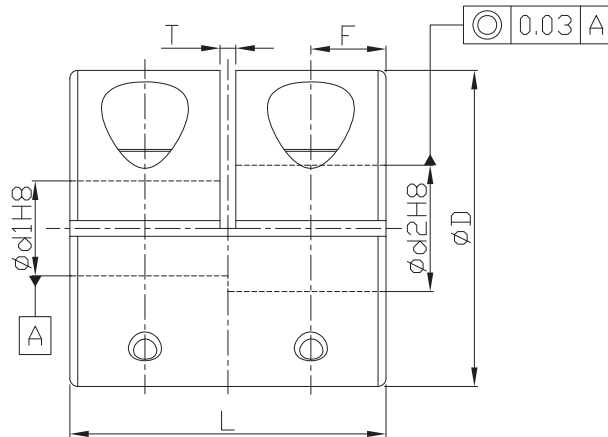

*Ød1&Ød2 tolerance are defined before machining.

Material	Surface finish	Accessories
Aluminum alloy	Anodized	Clamping screw

Dimensions		Ød1&Ød2 selection *Ød1 ≤ Ød2									L	A	T	F	M Rough thread
Model no.	ØD	5	6	8	10	12	14	15	16	18					
RACS	16	•	•								16	5	1	3.75	2.5
	20		•	•							20	6.5		4.75	
	25			•	•						25	9		6	3
	32				•	•	•				32	11		7.75	4
	40						•	•	•	•	44	13	1.5	10.5	5

★ Moment of inertial torque and weight calculated by maximum diameter.

Specification		Allowable wrench torque (N·m)	Max. RPM (r/min ⁻¹)	★ Moment of inertia (kg·m ⁻²)	Screw fixing torque (N·m)	★ Weight (g)
Model no.	ØD					
RACS	16	0.3	9500	3.0*10 ⁻⁷	1	9
	20	0.5	7600	8.7*10 ⁻⁷		15
	25	1	6100	2.7*10 ⁻⁶	1.5	29
	32	2	4800	7.1*10 ⁻⁶	2.5	61
	40	4	4000	1.5*10 ⁻⁵	7	120

Ordering Example:

RACS32 - 10 - 12 - 100 PCS
Model no. Ød1 Ød2 Q'ty